

# SEAL-LOCK® XP (SLXP)

## Connection Technology | Integral Joint Tubing

### Features


- Dual torque shoulders
- Metal-to-metal, gas-tight seal
- Rugged 5-pitch hooked threadform makes up within 5 turns
- Can be recut on standard API or premium upsets
- All weights within a size range are interchangeable

### Benefits

- Ideally suited for tubing and work string applications
- High torque performance at competitive cost
- Prompt, expert service worldwide

**The SLXP is designed for all types of work string and production tubing applications.**

The connection features a metal-to-metal, gas-tight seal, dual torque shoulders and a tapered 5-pitch, “hooked” threadform. Ideally suited for tubing work strings, the connection makes within 5 turns and can be re-cut on either standard length API EUE or 2-Step premium upsets.

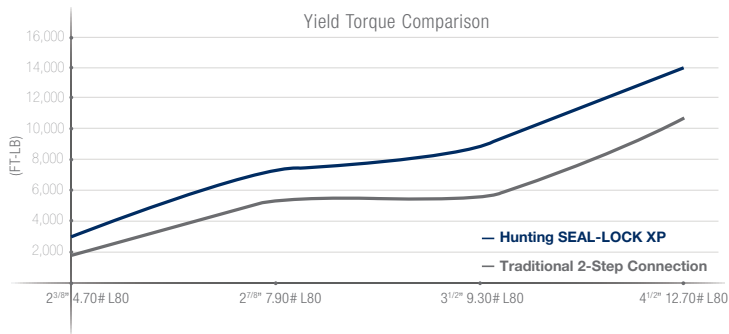

External torque shoulder



Hooked thread design



Internal torque shoulder, metal-to-metal seal and lubricant relief groove



Metal-to-metal seal with optional seal ring for plastic-coated applications