


## Wireline Stem Bars - Lead Filled

Hunting Lead Filled Wireline Stem Bars, often referred to as “sinker bars”, are designed to serve one purpose. They provide the weight required to overcome friction and pressure differential within the stuffing box during wireline operations, allowing the toolstring to descend into the well.


Lead filled Stem Bars are utilised as a substitute for conventional stem bars when extra weight is required. However, they should not be used in operations where heavy jarring is expected.

 Lead filled Stem Bars are utilised as a substitute for conventional stem bars when extra weight is required.

Hunting Lead Filled Stem Bars are available in various diameters and lengths. They are supplied with industry standard pin by box connections complete with fishing necks.

### WIRELINE STEM BARS - LEAD FILLED

Nominal Size	Fishing Neck	Connection on Tool	Length	Part Number
1.250"	1.000"	15/16 10	2ft	044STL125002
1.250"	1.000"	15/16-10	3ft	044STL125003
1.250"	1.000"	15/16-10	5ft	044STL125005
1.500"	1.375"	15/16-10	2ft	044STL150002
1.500"	1.375"	15/16-10	3ft	044STL150003
1.500"	1.375"	15/16-10	5ft	044STL150005
1.750"	1.375"	15/16-10	2ft	044STL175002
1.750"	1.375"	15/16-10	3ft	044STL175003
1.750"	1.375"	15/16-10	5ft	044STL175005
1.875"	1.750"	1 1/16-10	2ft	044STL187502
1.875"	1.750"	1 1/16-10	3ft	044STL187503
1.875"	1.750"	1 1/16-10	5ft	044STL187505
2.125"	1.750"	1 1/16-10	2ft	044STL212502
2.125"	1.750"	1 1/16-10	3ft	044STL212503
2.125"	1.750"	1 1/16-10	5ft	044STL212505
2.500"	2.313"	1 9/16-10	2ft	044STL250002
2.500"	2.313"	1 9/16-10	3ft	044STL250003
2.500"	2.313"	1 9/16-10	5ft	044STL250005

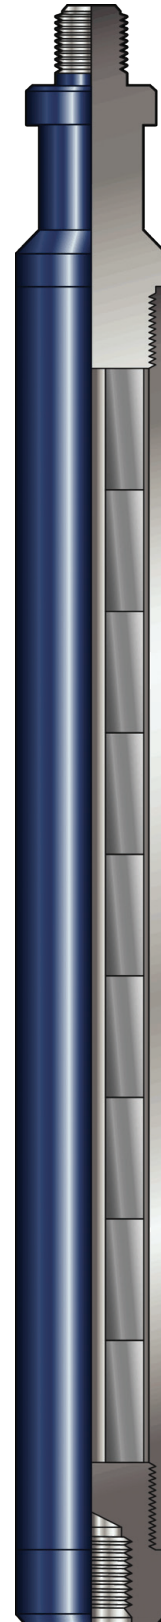

Wireline Operations - Slickline Tools



Available Connections

