



The Top Fire Adapter (TFA) harnesses the technology behind the H-1® Perforating Gun System to provide a wire-free and RF-Safe solution for conventional systems.

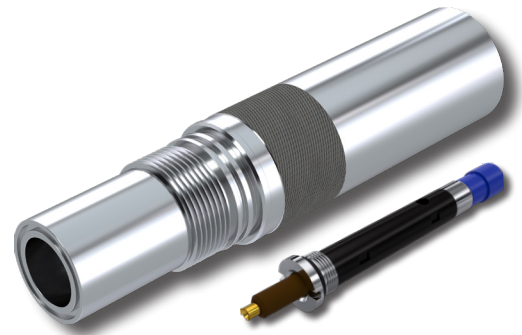


### Top Fire Adapter Available for Each Style of Quick-Change Assembly

#### H-1 Style

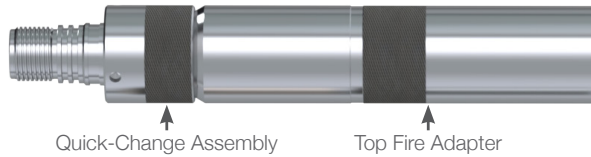


#### GO Style (2" & 2-1/2")

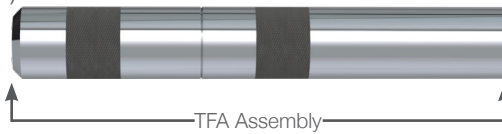

#### GO Style (2-3/4" - 7")



#### SIE Style

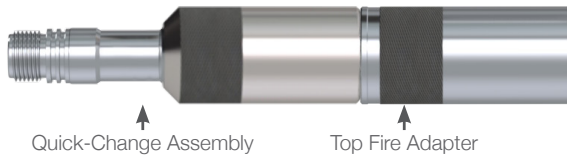

#### Hardware Specifications

Part Number	0222-TFA-100	0362-TFA-100	0362-TFA-110	0362-TFA-120	0363-TFA-100	0363-TFA-110	0363-TFA-120
Style	GO Style	GO Style	SIE Style	H-1® Style	GO Style	SIE Style	H-1® Style
Quick-Change Part Number	-	0271-100-040	0260-100-040	3271-275-030	0256-100-040	0260-100-000	3271-312-030
Gun Size	2 - 2-1/2 in. (51-64 mm)	2-3/4 in. - 2-7/8 in. (40 - 73 mm) †			3-1/8 - 7 in. (79 - 178 mm)		
O.D. (in.) [mm]	2.00 [51]	2.75 [70]			3.13 [79]		
Weight (lb) [kg]	8.00 [3.63]	12.93 [5.86]	10.58 [4.80]	16.36 [7.42]	18.38 [8.34]	12.81 [5.81]	21.59 [9.79]
Max. Temperature (°F) [°C]	350 [177]	350 [177]			350 [177]		
Max. Pressure (psi) [MPa]	20,000 [138]	20,000 [138]			20,000 [138]		
Max. Tension (lbf) [kN]	102,000 [454]	160,000 [712]			183,000 [814]		